

General hints:

A. Intended age range

This equipment is suitable for children up to 5 years old.

B. Surfacing requirements

This equipment should be installed on an impact absorbing surfacing / loose fill material that accords with EN 1177 and is adequate for a maximum free height of fall of 0.60 m.

C. Foundations

No additional foundations are required.


Special information:

Tested by TÜV Product Service GmbH.

Please do not alter any parts of the equipment or the construction itself since this may affect the safety standards and your guarantee.

We reserve the right to make technical alterations!
For further information please call your local agent.

Dwarfs Hill
Order no. 4.06000



Data for shipment:

Number of parts: 3

2 hill sections

1 bundle: floor, bracing beams

Total weight: 500 kg
Largest single part: 230 kg


Required space including safety distances (EN 1176):

600 x 645 cm

Ground elevation

Scale 1:100

all dimensions in cm




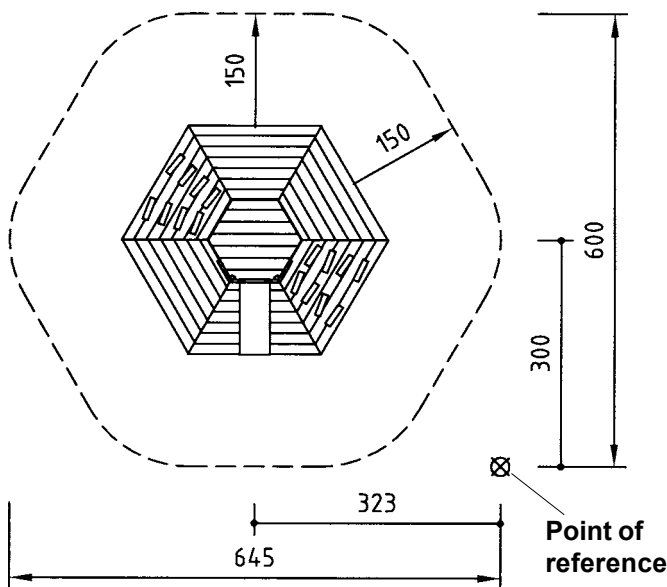


Recommended assembly aids:

- Set of carpenter's tools
- Set of ratchets
- Torx insert T25, T30, T50

Sequence of assembly operations:

1. Locate the site and take into account the space required, including the safety distances, according to the ground elevation on page 1.
2. Level the mounting surface (e. g. sand) for the play equipment at the planned elevation.
3. Place the two hill sections onto the prepared surface and screw together at the marked locations. (The tie beams for transport can remain in place, they add to the stability of the play equipment).
4. Place the floor onto the marked location and screw on.
5. Screw the bracing beams onto the side panels.
6. Repair minor damages caused during assembly or transportation.
7. Please ensure that all assembly aids, e. g. excess bolts, assembly instructions, distance battens or tape are removed entirely from the play equipment and the playground after work is finished.

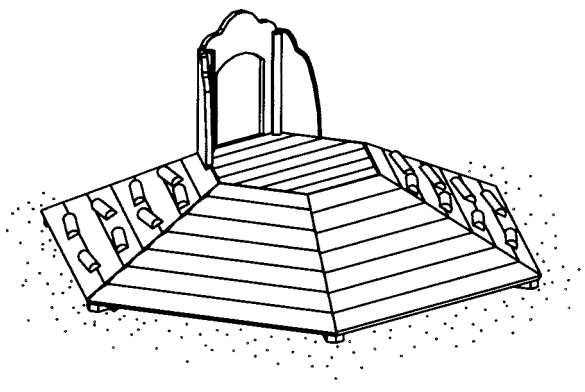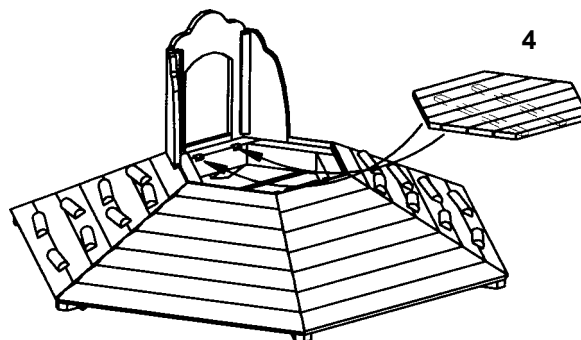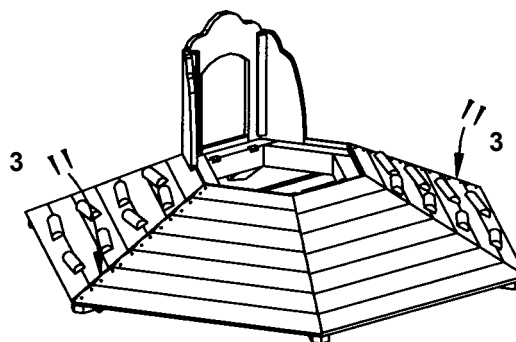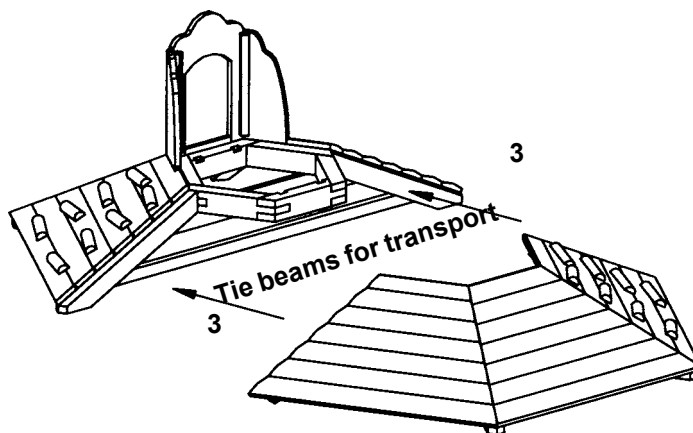

Please note that after about 6 weeks all screws and bolts need to be checked and, if necessary, retightened.