

General hints:

A. Surfacing requirements

This element does not reach the free height of fall limit of 600 mm above which a specific requirement for impact absorbing surfacing or materials is necessary.

B. Foundations

No concrete foundations required.


Special information:

Tested by TÜV Product Service GmbH.

Please do not alter any parts of the equipment or the construction itself since this may affect the safety standards and your guarantee.

We reserve the right to make technical alterations!
For further information please call your local agent.

Snail Queen
with prefabricated foundation
Order no. 4.24220
(4.24221)



Data for shipment:

Number of parts: 1

1 equipment complete with prefabricated foundation

Total weight: 90 kg

Required space including safety distances (EN 1176):

300 x 235 cm


Ground elevation

Scale 1:50

all dimensions in cm

Excavation depth:

20 cm

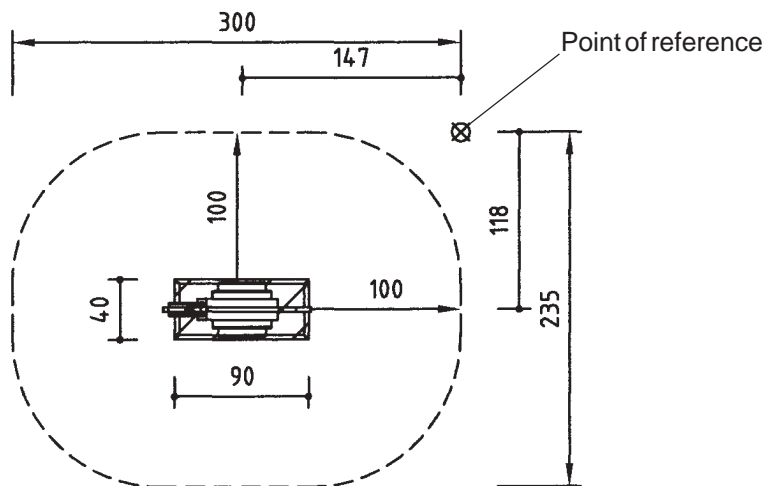


Recommended assembly tools:

- Set of carpenter's tools
- Set of ratchets
- Set of spanners
- Torx insert T 20, 25, 30, 40, 50
- Rubber mallet

Sequence of assembly operations:

1. Locate the site and take into account the space required, including the safety distances, according to the ground elevation on page 1.

2. Start surveying at the point of reference  and dig out the foundation holes.

3. Place the complete equipment into the foundation hole and cover the foundation up to ground level with surfacing material.

4. Repair minor damages caused during assembly or transportation.

5. Please ensure that all assembly aids, e. g. excess bolts, assembly instructions, distance battens or tape are removed entirely from the play equipment and the playground after work is finished.

