

General hints:

A. Surfacing requirements

This element does not reach the free height of fall limit of 600 mm above which a specific requirement for impact absorbing surfacing or materials is necessary.

B. Foundations

Please see detailed instructions at the end of this document, especially depths of foundations for steel feet.


Special information:

Tested by TÜV Product Service GmbH.

Please do not alter any parts of the equipment or the construction itself since this may affect the safety standards and your guarantee.

We reserve the right to make technical alterations! For further information please call your local agent.

Snail
Order no. 4.24230



Snail of laminated wood
Order no. 4.24234

Data for shipment:

Number of parts: 1
1 Snail with 2 foundation irons

Total weight: 200 kg

Required space including safety distances (EN 1176):

380 x 270 cm


Ground elevation

Scale 1:50
all dimensions in cm

Foundation block

Quality of concrete C 25/30

1 piece 50 x 30 x 50 cm
Excavation depth 50 cm

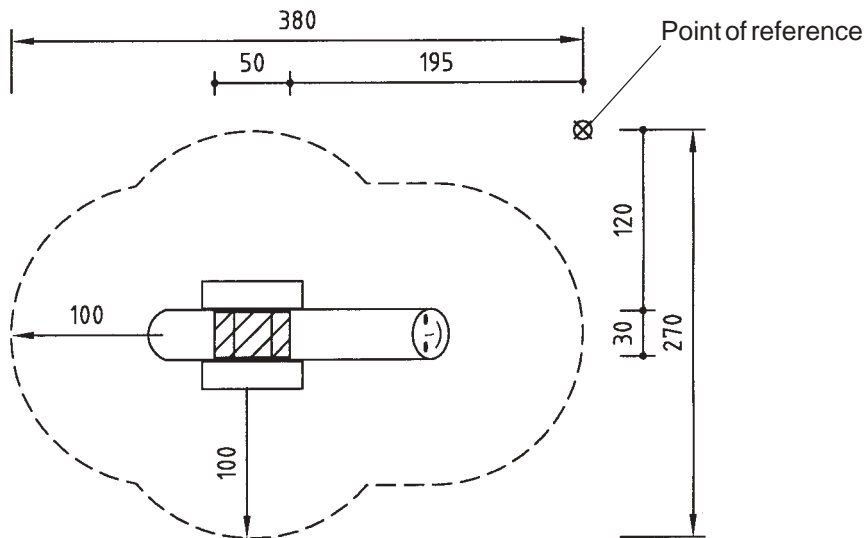


Recommended assembly tools:

- Set of carpenter's tools
- Set of ratchets

Attention!

During the assembly period (including the setting of the concrete) it is not allowed to play on or put any weight on the equipment in order to secure stability during use after the assembly. Standard concrete requires at least 2 weeks to set.

Sequence of assembly operations:

1. Locate the site and take into account the space required, including the safety distances, according to the ground elevation on page 1.
2. Start surveying at the point of reference  and dig out the foundation holes.
3. Screw the foundation irons onto the body of the snail.
4. Fill the foundation holes with concrete (according to sketch), tamp and round the edges. Cover the foundation with surfacing material.
Please take into account the special sheet: Notes on the construction of foundations.
5. Repair minor damages caused during assembly or transportation.
6. Please ensure that all assembly aids, e. g. excess bolts, assembly instructions, distance battens or tape are removed entirely from the play equipment and the playground after work is finished.

