

**General hints:**

**A. Intended age range**

This equipment is suitable for children from 2 years.

**B. Surfacing requirements**

This piece of equipment is intended for children to play with, rather than on, and therefore has no intended body support. No free height of fall is thereby stipulated.

**C. Foundations**

Please see detailed instructions at the end of this document.


**Special information:**

Tested by TÜV Product Service GmbH.

Please do not alter any parts of the equipment or the construction itself since this may affect the safety standards and your guarantee.

We reserve the right to make technical alterations!  
For further information please call your local agent.

**Bell Tower**  
Order no. 9.02510



**Data for shipment:**

Number of parts: 4

- 2 support frames
- 1 roof with accessories
- 1 bundle: bracing battens

Total weight: 1000 kg  
Largest single part: 700 kg

En-EN 25.08.2003

Copyright © Richter Spielgeräte GmbH \* 83112 Frasdorf \* Germany

**Required space including safety distances (EN 1176):**

475 x 230 cm

**Ground elevation**


Scale 1:50

all dimensions in cm

**Foundation blocks**

4 pieces 80 x 80 x 80 cm

Excavation depth 100 cm

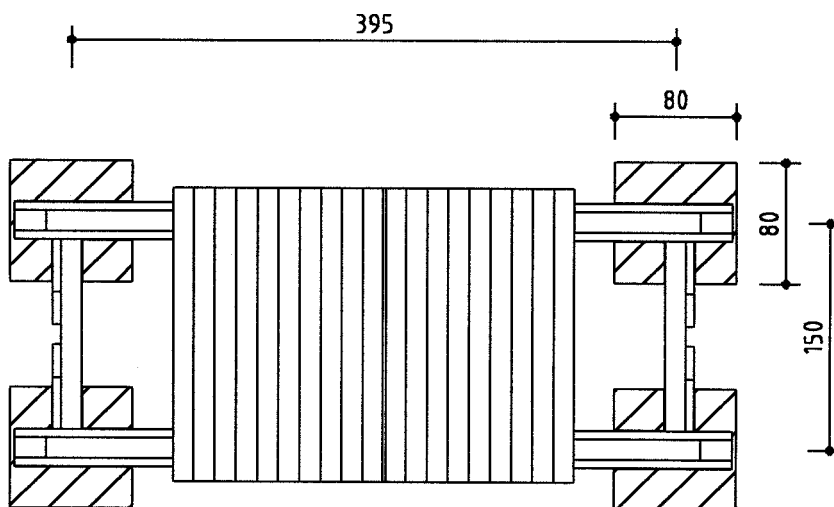

**Recommended assembly aids:**

- Set of carpenter's tools
- Set of ratchets
- Rubber mallet
- Battens for support during assembly
- Crane or similar for lifting the roof

**Attention!**


During the assembly period (including the setting of the concrete) it is not allowed to play on or put any weight on the equipment in order to secure stability during use after the assembly. Standard concrete requires at least 2 weeks to set.

**Sequence of assembly operations:**


1. Locate the site and take into account the space required according to the ground elevation on page 1.

2. Dig out the foundation holes.


3. Hammer the anchoring irons into the support frames. Place the support frames into the foundation holes and fix in position with battens. The bracing battens of the support frames have to show to the outside.

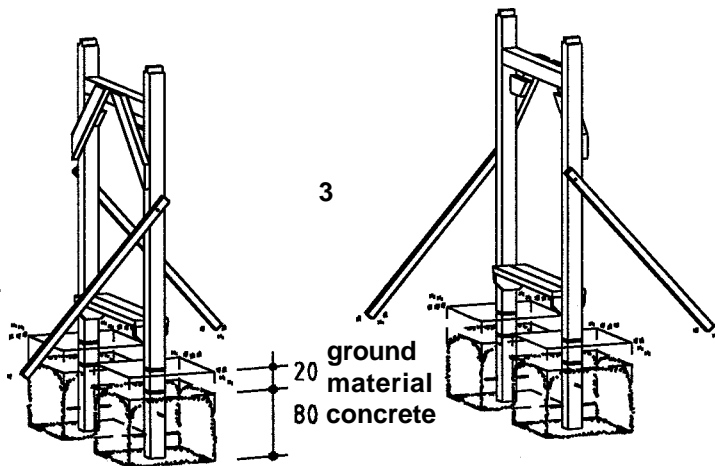

4. Put the roof onto the support frame. Align the equipment.

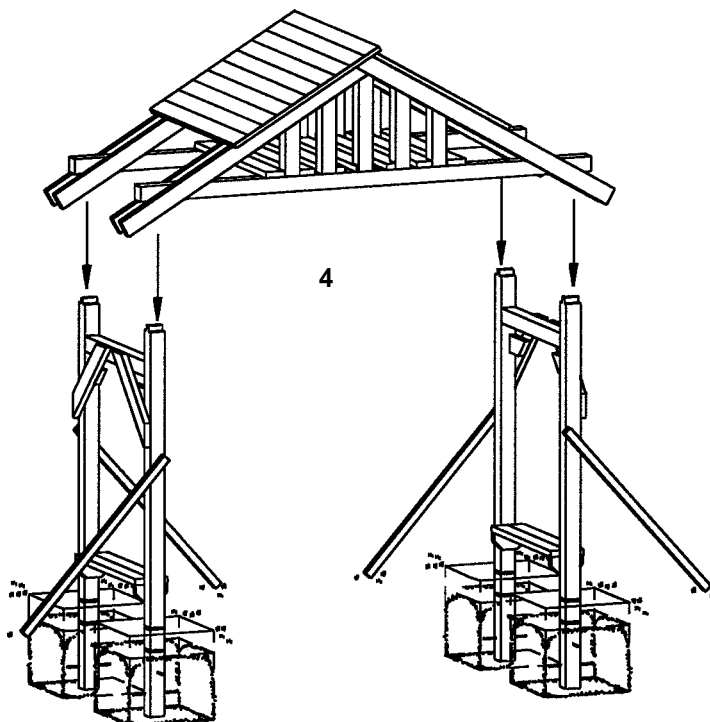

5. Screw the predrilled bracing battens onto the equipment according to the marks.

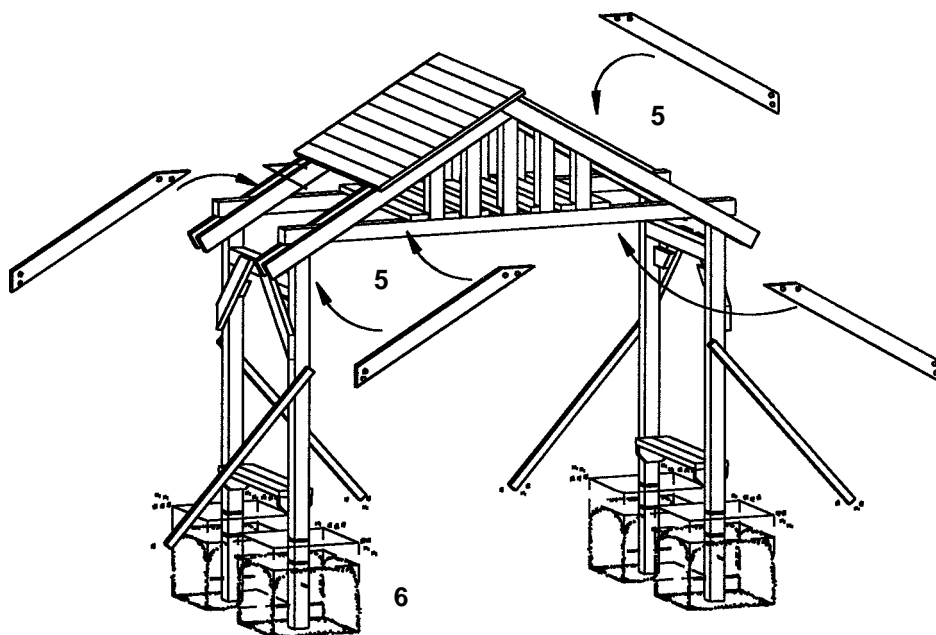


6. Fill the foundation holes with concrete B 25, 'earth damp', largest grain size 16 mm and tamp. Round the edges of the foundations and cover with ground material.

7. Pull the ropes through the individual holes of the bottom of the roof.

8. Repair minor damages caused during assembly or transportation.

9. Please ensure that all assembly aids, e. g. excess bolts, assembly instructions, distance battens or tape are removed entirely from the play equipment and the playground after work is finished.

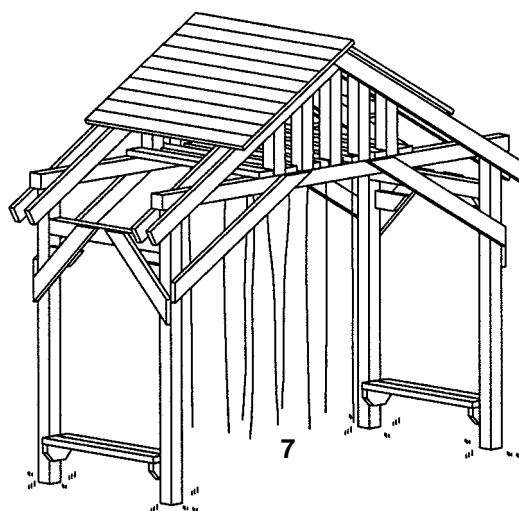

**Please note that after about 6 weeks all screws and bolts need to be checked and, if necessary, retightened.**