

General hints:

A. Intended age range

This equipment is suitable for all age groups from 5 years.

B. Surfacing requirements

This equipment does not reach the free height of fall limit of 600 mm above which a specific requirement for impact absorbing surfacing or materials is necessary.

C. Foundations

Please see detailed instructions at the end of this document.


Special information:

Tested by TÜV Product Service GmbH.

Please do not alter any parts of the equipment or the construction itself since this may affect the safety standards and your guarantee.

We reserve the right to make technical alterations!
For further information please call your local agent.

Mirror Rotunda
Order no. 9.10020



Data for shipment:

Number of parts: 1 pallet

Total weight: 200 kg
Largest single part: 200 kg

Required space including safety distances (EN 1176):


E X A M P L E with two Mirror Rotundas
520 x Ø 380 cm

Ground elevation

Scale 1:50
all dimensions in cm

Foundation blocks

2 pieces 80 x 80 x 60 cm
Excavation depth 80 cm

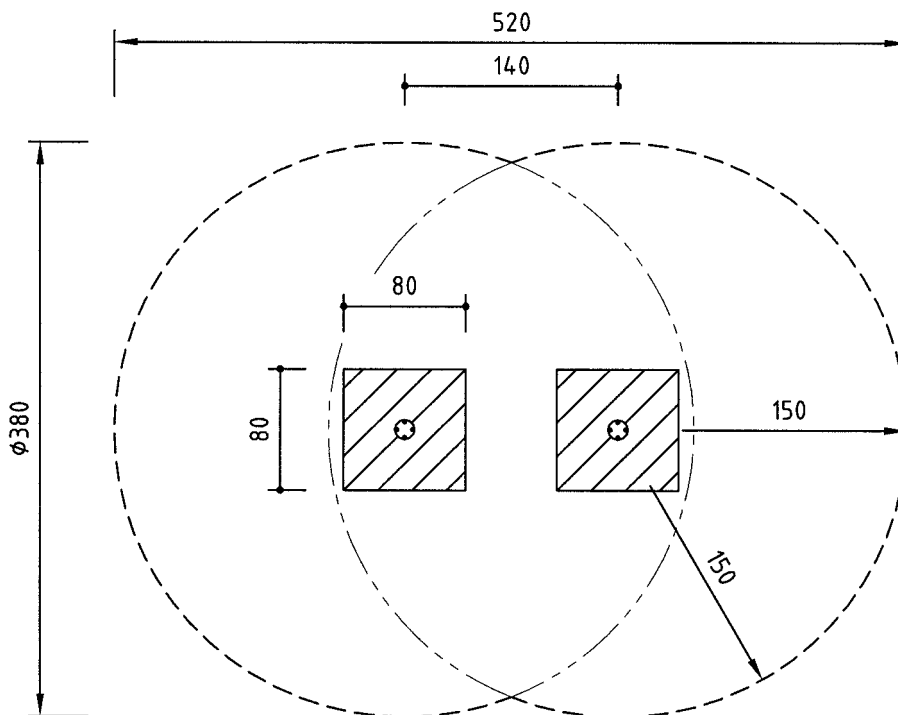

Recommended assembly aids:

Set of ratchets

Attention!

During the assembly period (including the setting of the concrete) it is not allowed to play on or put any weight on the equipment in order to secure stability during use after the assembly. Standard concrete requires at least 2 weeks to set.



Sequence of assembly operations:

1. Locate the site and take into account the space required, including the safety distances, according to the ground elevation on page 1.


Important note!

If several Mirror Rotundas are installed next to each other pay particular attention to keep a minimum distance of 1.40 m between their centres of anchoring tubes.

2. Dig out the foundation holes and fill the foundation hole with concrete B 25, earth damp, and push the anchoring tube into the damp concrete to below ground level.

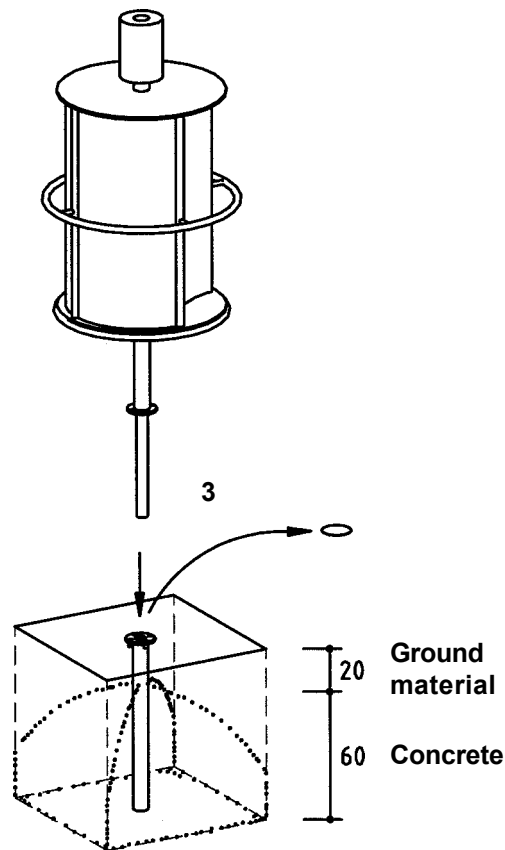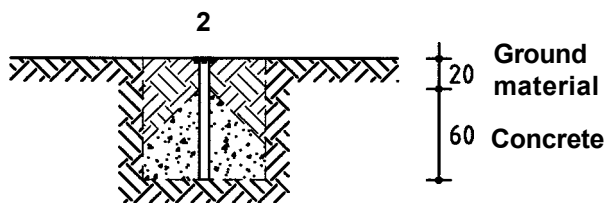

3. After the concrete has set, remove the covering and insert the equipment into the anchoring tube and fasten onto the flange.
4. Repair minor damages caused during assembly or transportation.
5. Please ensure that all assembly aids, e. g. excess bolts, assembly instructions, distance battens or tape are removed entirely from the play equipment and the playground after work is finished.

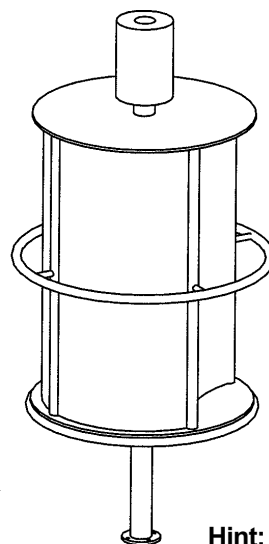

Hint:
The exertion, which is necessary to turn the Mirror Rotunda, belongs to the play value!

Please note that after about 6 weeks all screws and bolts need to be checked and, if necessary, retightened.