

Instructions for wear checks of play equipment

Playground:




Date of installation:

Checks depend on the kind of equipment. Any equipment with moving parts must be checked at least twice a year, static equipment at least once a year.

Intervals for maintenance work and checks generally depend on:

- location
- kind of use
- frequency of use
- possible vandalism

For more details see also "General instructions for maintenance of playgrounds"
Hexagonal Swing
 Order no. 6.17000

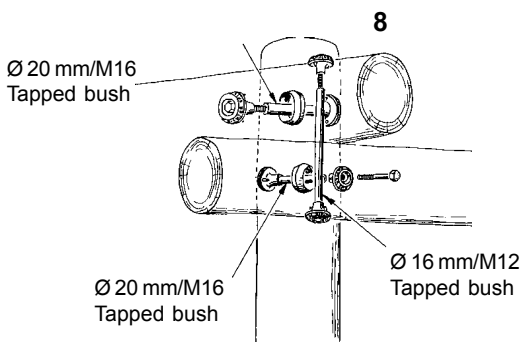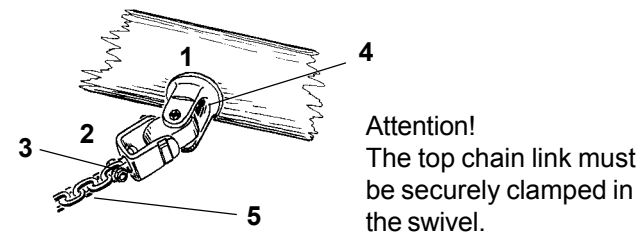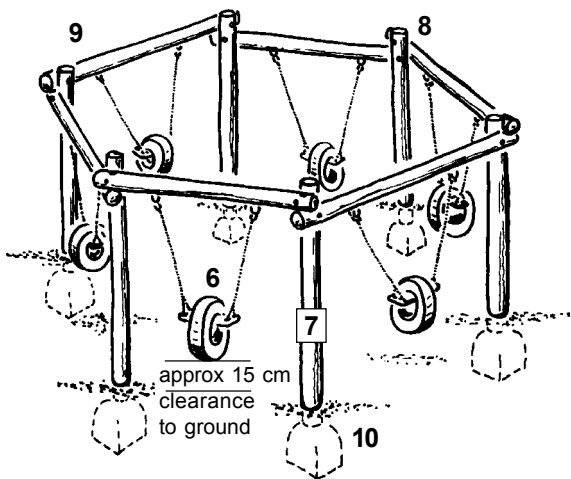


For spare parts please turn over!










The equipment must be checked for correct operation and safety, especially the points listed below:		Proof of maintenance		
		1.	2.	3. etc.
Universal joints				
1	Check the fork of the joint, the gap must be parallel to the beam	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
2	Check the joint in both directions for smooth operation	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
3	Check anti-winding device for smooth operation, grease lightly if required	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
4	Check the connection to the wood, recess of the joint must be flush to the wood	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
5	Check the chains and the connections to the chains, top chain link must be securely clamped, check wear to adjacent moving link	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Tyre seats				
6	Clean the drainage hole in the tyres	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Wooden parts				
7	Check for dry rot, smooth splinters	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
8	Check all wood joints for tightness according to the sketch, tighten if necessary	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
9	Recommendation: Apply paraffin wax to the end grain faces of the wood once a year	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Structural stability				
10	Dig out foundations and check for stability once a year	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
		Special notes (e. g. for repairs):	Special notes (e. g. for repairs):	Special notes (e. g. for repairs):
Repair not carried out, it is still possible to play on the equipment		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Repair not carried out, equipment is taken out of action		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
All work carried out, everything is in order		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Maintenance carried out by	
Date	

Spare parts for:

Hexagonal Swing
Order no. 6.17000



Please note that the safety level must not be compromised. This is why it is advisable to use **original spare parts** for repairs.

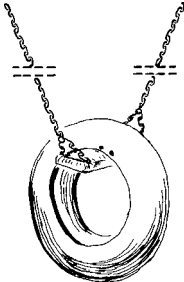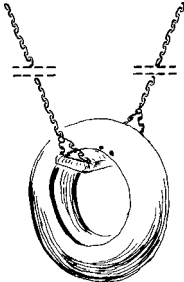Order no.	Item	Order no.	Item
0.93150	 <p>Swing joint with swivel</p>	0.88160	 <p>Sintered bush for square bar</p>
0.93160	 <p>Pair of chains 6 mm Length 1.97 m</p>	0.20010	 <p>Stainless steel machine bolt M8x55 with locking nut</p>
0.93170	 <p>Pair of chains 6 mm Length 1.83 m</p>	0.20020	 <p>Stainless steel machine bolt M8x28 with locking nut</p>
0.93180	 <p>Tyre seat without chains</p>		
0.93190	 <p>Tyre seat with chains Length 1.83 m</p>		
0.93200	 <p>Tyre seat with chains Length 1.97 m</p>		