



Photo © Daniel Perales



Photo © Paul Upward

Play value

A large number of combination equipment gives the planner the opportunity to make playgrounds versatile and interesting. The Slide is an example of this.

Fundamental characteristics

- Unique and original
- Appealing design
- Incentive for playing: experiencing height, role-playing games
- Movement: climbing, sliding

Recommended for

- Kindergarten children
- School children
- Supervised play areas, such as kindergartens, schools, after-school programmes or similar
- Public play areas without supervision, such as playgrounds, parks or similar



Order No. 3.19210 Slide



Order No. 3.19200 Slide

Note on installation

Avoid orientation of the slide to the south (heating up of material).

Slides for attachment to Huts



3.19200




3.19210




3.19220

Order No. 3.19200
Slide
for attachment to Huts 1.00 m


Safety distance →
 Device dimensions —●—
 Functional distance —|—

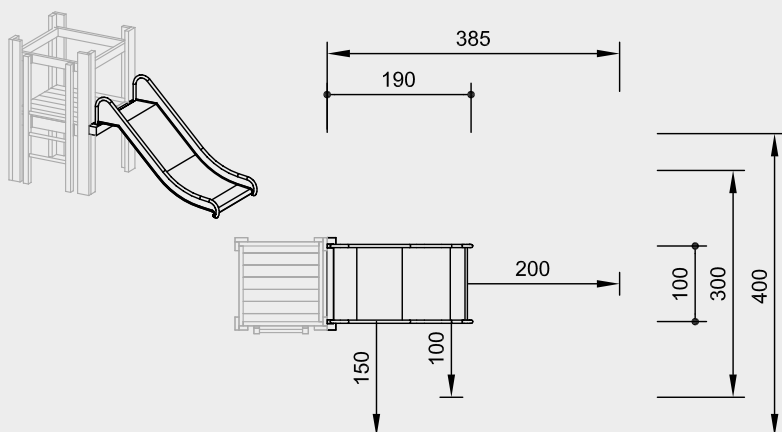

Order No. 3.19210
Slide
for attachment to Huts 1.50 m

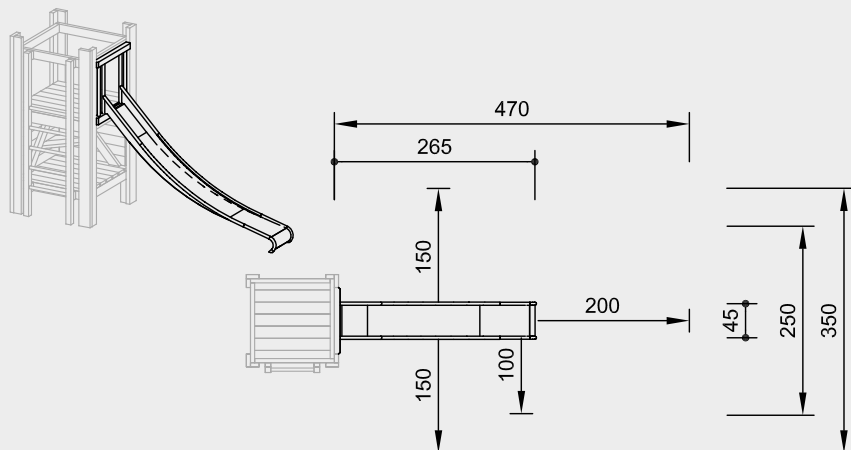

Order No. 3.19220
Slide
for attachment to Huts 1.00 m

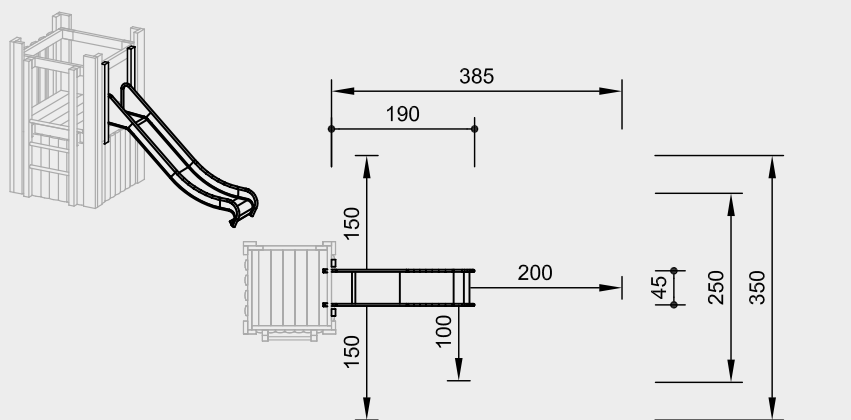

Scale 1:100

Safety check according to DIN EN 1176

Technical information

Slides made of stainless steel,
 glass bead blasted
 Handrail tube Ø 42 mm
 Ground anchor made of oak heartwood

Core-free

Sawn-timbers core-free, thus decreasing
 occurrences of cracking and undesired
 changes in shape



Order No. 3.19210

One-piece construction

Total construction of the slide made of
 2 mm stainless steel, drawn in box form,
 surface glass bead blasted, without
 welding seam between sliding surface
 and side cheek



**For more detailed explanation of the
 quality characteristics see price list.**

Order No. 3.19200

Thickness of sides 2 mm
 Thickness of sliding surface 3 mm

Order No. 3.19220

Thickness of sides 2 mm
 Thickness of sliding surface 2 mm

Dimensions

(small deviations possible)

Order No. 3.19200

Installation height 1.00 m
 Width 1.00 m
 Weight 65 kg

Order No. 3.19210

Installation height 1.50 m
 Width 0.45 m
 Weight 53 kg

Order No. 3.19220

Installation height 1.00 m
 Width 0.45 m
 Weight 45 kg

Components

Order No. 3.19200

1 Slide with ground anchor
 1 Slide support

Order No. 3.19210 / 3.19220

1 Slide with ground anchor
 1 Support frame

Installation information

Surfacing requirements
 corresponding to a fall height of
Order No. 3.19200 / 3.19220 ≤ 1.00 m
Order No. 3.19210 ≤ 1.50 m
 (please refer to price list for more
 detailed information)

Foundations
 Excavation depth
 for ground anchor 55 cm

Attention:

**Exact measurements may vary;
 for all installation dimensions refer
 to current assembly instructions.**
 Technical changes reserved.



3.19200



3.19210



3.19220