



Photo © Daniel Perales

Play value

The Little Whale is a point of attraction for water play areas. It does not only have a very appealing design, there is also a surprise hidden inside. It is necessary to use the whole body for obtaining the desired effect. When the Little Whale moves to and fro, it expels a water jet. But it is also possible to sit on the whale and to be rocked softly. The Little Whale is a very attractive play offer also for town centres.

Fundamental characteristics

- Attractive, child-orientated design
- Integrated pressure pump for creating the water jet
- Incentive for playing: animal
- Movement: moving one's centre of gravity

Recommended for

- School children
- Public play areas without supervision, such as kindergartens, schools, after-school programmes or similar
- Swimming pools without supervision, such as outdoor pools, adventure pools or similar




Photo © Daniel Perales

Little Whale

Planning information


Individual solutions for the water supply must be devised, depending on the plans. Up-to-date details on the connection for the water supply and other technical information is available to download as a table at our website www.richter-spielgeraete.de.



5.18500

Order No. 5.18500
Little Whale

Safety distance →
Device dimensions —●—
Functional distance —|—

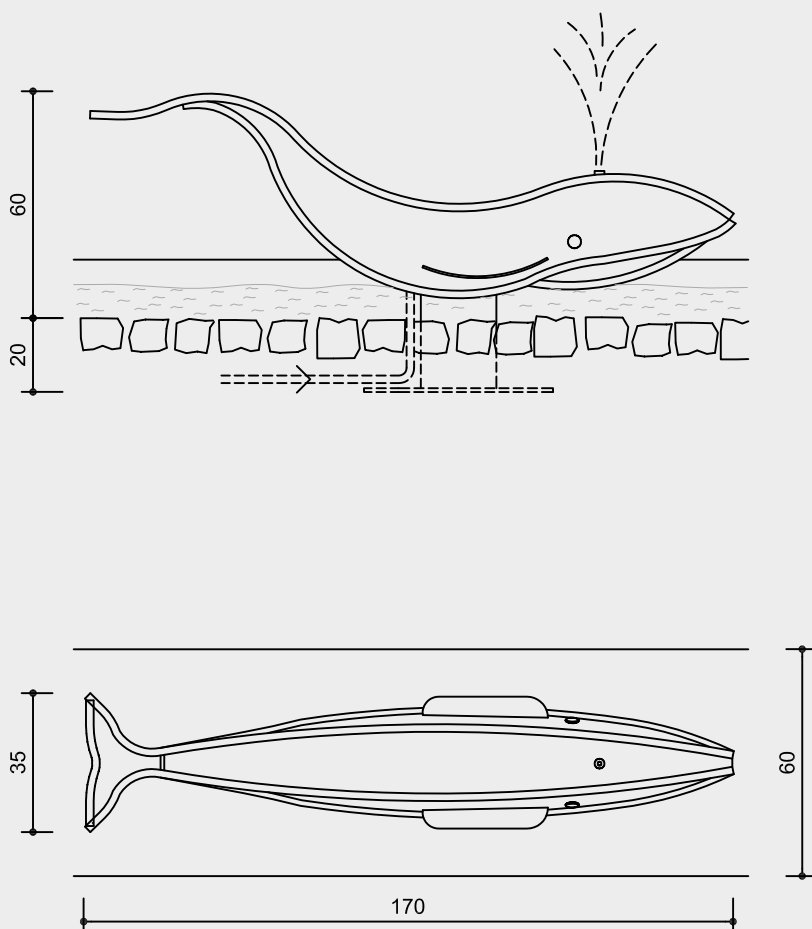

Scale 1:20

Safety check according to DIN EN 1176

Components

- 1 Whale with base plate for dowelling,
with float tank

Installation information

Surfacing requirements
Surfacing requirements
for heavy duty bolting
corresponding to a fall height of ≤ 0.60 m
(please refer to price list for more
detailed information)

Paving stone or similar with drainage

The water depth has no influence on the
function.

Foundations
1 item 80 x 50 x 50 cm
Excavation depth 70 cm

Water supply need to be made by the
customer.

Technical information

Equipment made of stainless steel,
glass bead blasted

Sintered bush

For all reciprocating movements we
use sintered plain bearings which are
self-lubricating in use and can easily be
exchanged if necessary



Ground anchor

All parts used for anchoring to the
ground are made of hot-dip galvanised
steel or stainless steel



**For more detailed explanation of the
quality characteristics see price list.**

Integrated float valve for direct
connection to the mains water,
max. 6 bar
External connection thread 1/2 inch
Compression proof diameter 1/2 inch
Water requirements approx. 4 l/min

Dimensions

(small deviations possible)


Height	0.60 m
Length	1.70 m
Width	0.35 m
Weight	70 kg

Attention:

**Exact measurements may vary;
for all installation dimensions refer
to current assembly instructions.**

Technical changes reserved.

**For use in aggressive environments
such as salt or chlorine water, the
equipment is also available in
marine grade steel (V4A).**



5.18500