

Play value

Our Sand Play Platform for wheelchair users provides creative playing possibilities reminiscent of elements of a construction process. The sand hoist, chute and sand pipe can be used for child-friendly construction work and to simulate a variety of work processes from the adult world. The design takes the special restricted mobility requirements into account, yet still allows access to the sand and mud. The ramp provides access to the platform on the same level.

Fundamental characteristics

- Sturdy design
- Variety of playing activities with a distinct
- Integrated nature
- Incentive for playing: sand, hoist
- Movement: physical effort

Recommended for

- School children
- Supervised play areas, such as kindergartens, schools, after-school programmes or similar
- Public play areas without supervision, such as playgrounds, parks or similar

Barrier-free

- Independent play



Special version with a longer ramp




Sand Play Platform for wheelchair users

Note Coloured elements can be designed at an extra charge.





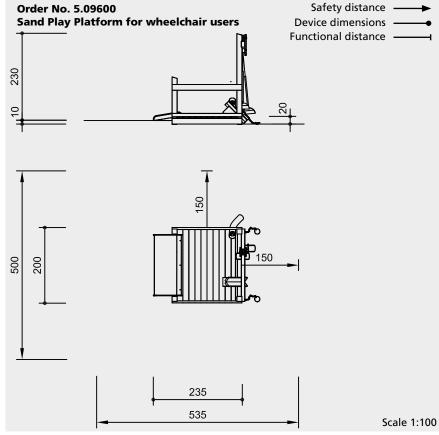

Safety check according to DIN EN 1176

Components

1 Sand Play Platform with sand hoist, chute, sand pipe and ramp

Installation information

Surfacing requirements accessible with wheelchairs corresponding to a fall height of \leq 0.60 m (please refer to price list for more detailed information)

Operational space 535 x 500 cm

Foundations 4 items 60 x 60 x 60 cm Excavation depth 80 cm 2 items 30 x 30 x 20 cm Excavation depth 40 cm

Additional equipment can be provided especially for wheelchair users upon request.

Attention:

Exact measurements may vary; for all installation dimensions refer to current assembly instructions. Technical changes reserved.

Technical information

Equipment made of non-impregnated mountain larch

Bevel cut

Vertical stand posts with bevelled end grain section as constructive wood preservation measure



Core-free

Sawn-timbers core-free, thus decreasing occurrences of cracking and undesired changes in shape



Tongue and groove

Tongue and groove planks made of 4 cm solid wood, highly resilient, no trickling of dust / sand, protection against direct rain



Profiled washer

Profiled washer for covering protruding screw heads according to standard, improved pressure distribution and protection against water. Impedes loosening the bolt



Ground anchor

All parts used for anchoring to the ground are made of hot-dip galvanised steel or stainless steel



Chains

Chains made of hot-dip galvanized steel (1.4301 / 1.4571 at extra charge) welded before galvanising, short-linked, without eyelets on the connecting parts, easy to exchange and shorten



For more detailed explanation of the quality characteristics see price list.

Sand container made of textile-reinforced rubber belt, 8 mm thick

Ramp made of stainless steel

Dimensions

(small deviations possible)

Total height	2.40 m
Height of platform	0.20 m
Length	2.35 m
Width	2.00 m
Weight	300 kg