

**General hints:**

**A. Intended age range**

This equipment is suitable for children from 6 years.

**B. Surfacing requirements**

This equipment does not reach the free height of fall limit of 600 mm above which a specific requirement for impact absorbing surfacing or materials is necessary.

**C. Foundations**

No concrete foundations are required for this equipment.

**Special information:**

Tested by TÜV Product Service GmbH.

Please do not alter any parts of the equipment or the construction itself since this may affect the safety standards and your guarantee.

We reserve the right to make technical alterations!  
For further information please call your local agent.

**Phones in Concrete**

1 pair

Order no. 9.02710



**Surface sand blasted**

Order no. 9.02711

**Data for shipment:**

Number of parts: 3

2 phones (pillars in concrete)

1 bundle: plastic piping

Total weight: 720kg

Largest single part: 350kg

**Required space including safety distances (EN 1176):**

**Ground elevation**


Scale 1:100

all dimensions in cm

**Foundation blocks**

No concrete foundations are required

Excavation depth for phones and plastic piping: 50 cm


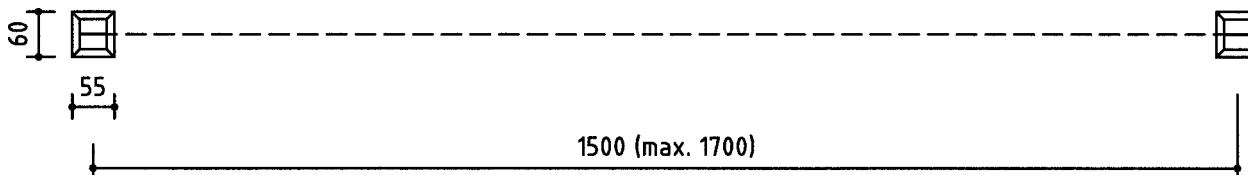


**Recommended assembly aids:**

- Spirit level
- Hand saw for plastic pipes

**Sequence of assembly operations:**

1. Locate the site and take into account the space required according to the ground elevation on page 1. The distance between the Phones should be approx 15 m (max 17 m).
2. Dig out the foundation holes and the ditch for the piping.
3. Erect the Phones and make sure that the openings for speaking face to the outside.
4. Starting at one Phone, lay the pipes on a bed of sand, approx 10 cm thick, and insert into the first Phone. It may be necessary to shorten a piece of pipe to fit into the opposite Phone (**see detail**).
5. Refill the foundation holes of the Phones and the ditch.

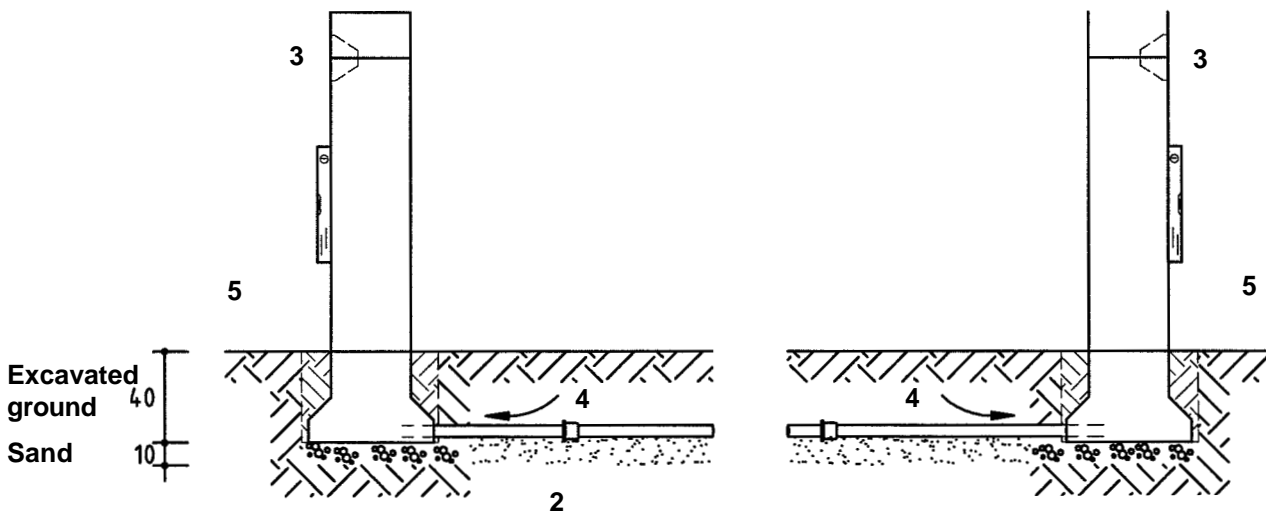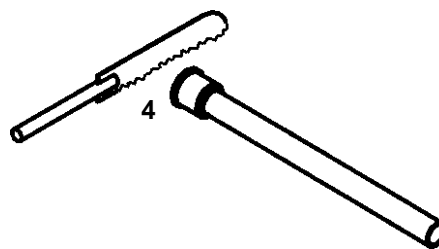

6. Repair minor damages caused during assembly or transportation.
7. Please ensure that all assembly aids, e. g. excess bolts, assembly instructions, distance battens or tape are removed entirely from the play equipment and the playground after work is finished.

